

MDL2000

Barcode laser scanner

+ Related products


MSL2000

- OEM
- Undecoded device
- Barcode laser scanner
- 20.4 x 11 x 14 mm (w x h x d)




MDL1000

- OEM
- Decoded device
- Barcode laser scanner
- 28 x 7.8 x 18 mm (w x h x d)



MDI1000

- OEM
- Camera + decoderboard
- 2D CMOS imager

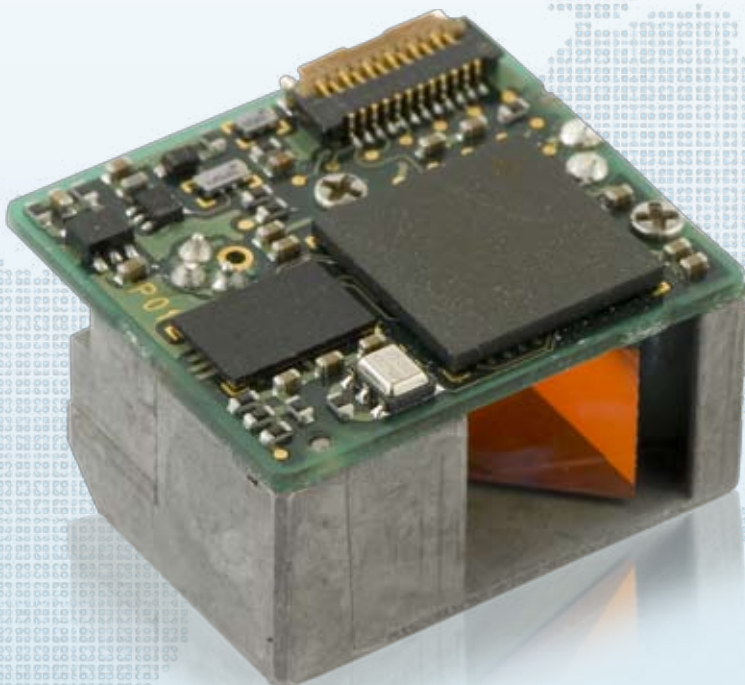

Communication

- Serial CMOS: 12 pin FFC connector

Power

- Voltage requirement: 3.3V ± 10%
- Current consumption: Max. 125mA

Barcode scanner Optics

- Light source: 650 nm visible laser diode
- Scan method: Bi-directional scanning
- Scan rate: 100 scans/sec
- Reading pitch angle: -35 to 0°, 0 to +35°
- Reading skew angle: -50 to -8°, +8 to +50°
- Reading tilt angle: -20 to 0°, 0 to +20°
- Curvature: R>15 mm (EAN8), R>20 mm (EAN13)
- Min. resolution at PCS 0.9: 0.127 mm / 5 mil
- Min. PCS value: 0.45
- Depth of field: At PCS 0.9 Code 39
70 - 650 mm / 2.76 - 25.59 in (1.0 mm / 39 mil),
50 - 420 mm / 1.97 - 16.54 in (0.5 mm / 20 mil),
50 - 260 mm / 1.97 - 10.24 in (0.25 mm / 10 mil),
50 - 150 mm / 1.97 - 5.91 in (0.15 mm / 6 mil),
60 - 120 mm / 2.36 - 4.72 in (0.127 mm / 5 mil)

Supported Symbologies

- Barcode (1D): JAN/UPC/EAN incl. add on, Codabar/NW-7, Code 11, Code 39, Code 93, Code 128, GS1-128 (EAN-128), GS1 DataBar (RSS), IATA, Industrial 2of5, Interleaved 2of5, ISBN-ISMN-ISSN, Matrix 2of5, MSI/Plessey, S-Code, Telepen, Tri-Optic, UK/Plessey
- Postal code: Chinese Post, Korean Postal Authority code
- 2D code: Composite codes, MicroPDF417, PDF417

Durability

- Temperature in operation: -20 to 65 °C / -4 to 149 °F
- Temperature in storage: -30 to 70 °C / -22 to 158 °F
- Humidity in operation: 5 - 90% (non-condensing)
- Humidity in storage: 5 - 90% (non-condensing)
- Ambient light immunity: Fluorescent 4,000 lx max, Direct sun 80,000 lx max, Incandescent 4,000 lx max
- Drop test: packed in dummy case 1.8 m / 6 ft drop onto concrete surface
- MBTF: 30,000 hours except laser diode (10,000 hours) and except mirror scan unit (10,000 hours)

Physical

- Dimensions (w x h x d):
20.4 x 11.2 x 18.0 mm / 0.80 x 0.44 x 0.71 in
- Weight body: Ca. 4.7 g / 0.17 oz

Regulatory & Safety

- Product compliance: CE, FCC, VCCI, RoHS, JIS-C-6802 Class 2, IEC 60825-1 Class 2, FDA CDRH Class II

Sold separately

- MEK1000 SDK (Development board, Getting started disc, RS232 cable)
- Connection cable
- Power supply 100-240V/0.5A, 50/60 Hz, 5V/2A

Copyright Opticon. All rights reserved. This information is subject to change without prior notice. For availability, contact your local representative.

- **The Netherlands:** Hoofddorp
- **France:** Issy Les Moulineaux
- **Germany:** Dietzenbach
- **Italy:** Castel Maggiore (BO)
- **Spain:** Valencia
- **Sweden:** Järfälla
- **United Kingdom:** Luton, Bedfordshire
- **U.S.A.:** Renton, WA
- **Japan:** Warabi City

- **Taiwan:** Taipei
- **P.R.China:** Shanghai
- **Australia:** Kariong
- **Brazil:** São Paulo

Opticon Sensors Europe B.V
European headquarters
Opaallaan 35
2132 XV Hoofddorp
The Netherlands
phone: +31 (0)23-5692700
fax: +31 (0)23-5638266
email: sales@opticon.com
internet: www.opticon.com

OPTICON
WWW.OPTICON.COM